



Features

Stand Alone Station

- Charging (Lithium-Ion Battery)
- Calibration
- Bump Test
- 3 Calibration gas ports
- Save Bump Test and Calibration records
- Bump Test and Calibration records copy to USB Jump Drive

Multi Module System

- Multiple connected to a PC (10 max)
- Charging
- Calibration
- Bump Test
- Configure GX-Force
- 3 Calibration gas ports

PC Controller Software

- Includes PC software for viewing/archiving bump test and calibration records
 - Archiving data to network location
 - Software controlled data retrieval
 - Automatic calibration / bump test option

Stand Alone Station


The SDM-Force is a versatile maintenance tool that automates the service of a GX-Force portable gas monitor. This docking station can be used as a stand alone device for charging, calibrating and bump testing, with all records stored automatically for future upload to a PC via USB flash drive (PC software and flash drive included).

PC-Controlled System

The SDM-Force can also be connected to a PC for automated calibration, bump testing, and archiving of datalog data from GX-Force instruments. Up to ten SDM-Force docking stations can be connected simultaneously using USB cables and the SDM-Force includes connections for one to three calibration gas cylinders.

Specifications	
Input Power	Main unit input: 5.2 VDC Accessory AC adapter input: 100-240 VAC
Operating Temperature	0 to 40 ° C (no sudden fluctuations)
Applicable Instruments	GX-Force
Memory capacity	Up to 500 bump tests, calibrations, or alarm checks
Number of Calibration Gas Cylinders	Up to three calibration gas cylinders
Standard Accessories	<ul style="list-style-type: none"> • USB-C cable for instrument connection • Air Filter • AC Adapter • Exhaust tubing • Flash drive • USB-A to USB-B cable • LAN cable

ORDERING INFORMATION	
Docking Station	
81-SDMFRC101	SDM-Force calibration station with 1 solenoid, filter, AC adapter, USB-C instrument connection cable, exhaust tube, flash drive, USB & LAN cables
81-SDMFRC102	SDM-Force calibration station with 1 solenoid, filter, AC adapter, USB-C instrument connection cable, exhaust and sample tube, flash drive, USB & LAN cables, DFR
81-SDMFRC103	SDM-Force calibration station with 1 solenoid, filter, AC adapter, USB-C instrument connection cable, exhaust and sample tube, flash drive, USB & LAN cables, DFR, 58 AL cyl H2S/CO/CH4/02, cylinder holder
81-SDMFRC104	SDM-Force calibration station with 1 solenoid, filter, AC adapter, USB-C instrument connection cable, exhaust and sample tube, flash drive, USB & LAN cables, DFR, 34 AL cyl H2S/CO/CH4/02, cylinder holder
81-SDMFRC201	SDM-Force calibration station with 2 solenoids, filter, AC adapter, USB-C instrument connection cable, exhaust tube, flash drive, USB & LAN cables
81-SDMFRC202	SDM-Force calibration station with 2 solenoids, filter, AC adapter, USB-C instrument connection cable, exhaust tube, flash drive, USB & LAN cables, 2 DFRs
81-SDMFRC203	SDM-Force calibration station with filter, AC adapter, USB-C instrument connection cable, exhaust and sample tube, flash drive, USB & LAN cables, DFR, 58 AL cyl H2S/CO/CH4/02, cylinder holder
81-SDMFRC204	SDM-Force calibration station with filter, AC adapter, USB-C instrument connection cable, exhaust and sample tube, flash drive, USB & LAN cables, DFR, 34 AL cyl H2S/CO/CH4/02, cylinder holder

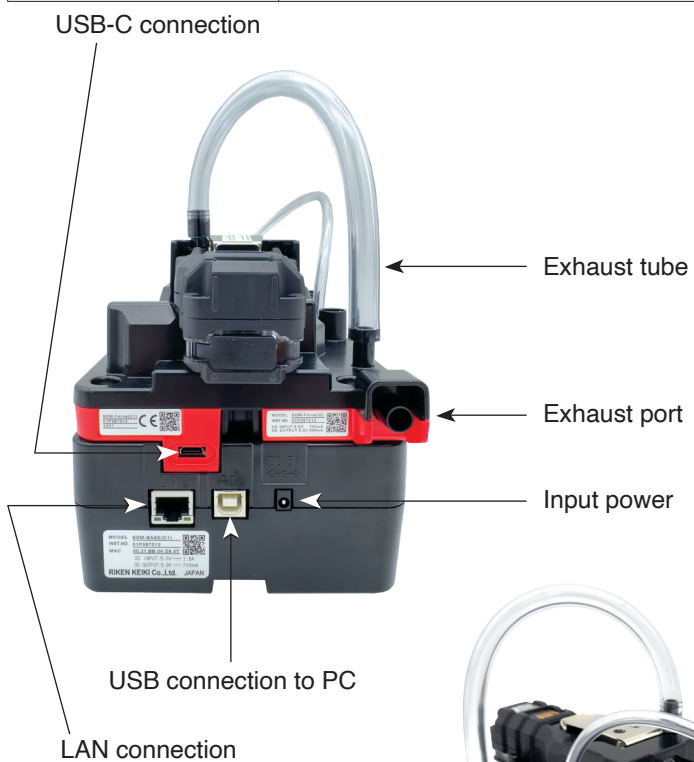

Authorized Distributor: