

Compact Design, Best for Installing in Nitrogen Reflow System

Zirconia Oxygen Analyzer

Model: RF-400-01

Zirconia oxygen analyzer Model RF-400-01 is developed for Nitrogen reflow system, based on our long experience of oxygen analyzers for electronic industry. It has achieved its higher durability due to equipped Toray unique zirconia mini-sensor available for long-term stable and precise measurement, and additional oxygen sensor protection system. This model with simple operation and compact size is most suitable to be installed in Nitrogen reflow or other system.

Features

- New-type Particle Filter**
 Filter change timing is easy to know by color function in response to oil. It can be replaced without removing oxygen analyzer from equipment.
- Special Filter**
 It makes the sensor life longer, and is ready for various depleted materials.
- Wide Power Supply**
 AC100V-240V power supply is available.
- Convenient Measurement Range**
 0-10000 ppm range generally used at Nitrogen reflow system is settable. (0-1 % range is also selectable).
- Compliant standards**

Safety: CE, UKCA	EN61010-1
EMC: CE	EN61326-1
- Environmental regulations**

RoHS	EN63000
------	---------



Measurement Principles

Toray's Zirconia Oxygen analyzers determine oxygen concentration using the conductivity of a zirconia ceramic cell. Zirconia ceramic cells only allow oxygen ions to pass through at high temperatures. With reference gas on one side and sample gas on the other, oxygen ions move from the side with the highest concentration of oxygen to that with the lowest concentration. The movement of ions generates an Electro Motive Force, which can be measured to determine the oxygen content. This is in accordance with the so-called Nernst Equation.



Specifications

1. Instruments Specifications


Type	Portable or Panel Mounted	
Display	Digital 4 Digits (O ₂ concentration Display)	
Meas. Range	10ppm - 100vol%O ₂ 0-1/10/100/1000/10000ppm (1)/10/100% 10 ⁻²⁰ -10 ⁻⁹ atm *Less than 10ppm is no guarantee. *0-10000ppm or 0-1% range is selectable.	
Sampling	Continuous suction by built-in pump	
Supplied Gas	1000-2000mL/min	
Sensor Gas	60±10mL/min	
Gas Connection	INLET (Sample Gas)	Rc1/4
	BYPASSOUT (Bypass Outlet)	Rc1/4
	OUTLET (Sample Gas)	Rc1/4
Reference Gas	Atmospheric Gas	
Weight	Approx. 6.5kg	
Color	Munsell N3 Matte Coating (Matte-black)	

2. Performance

Repeatability	±1%FS (1%(10000ppm) ≤ Meas. Gas ≤ 100%) ±2%FS (10ppm ≤ Meas. Gas < 1% (10000ppm)) (Less than 0-10ppm is no guarantee.)
Air Point Stability	±1%FS/24h

3. Engineering Specifications

Meas. Value Output	External Output: DC4-20mA, RS-232C
Limit Alarm	LED Display (Upper and Lower limits) Contact Output: 2a Independently Capacity: AC30V, DC30V, 1A
Self-Diagnosis	Warm-up Error, Thermo-Couple Error, Overheat Error, CPU Error, Furnace Error, Asymmetry Potential Error, O ₂ Sensor Resistance Error, AIR Point Calibration Error, SPAN Point Calibration Error
Sample Gas Conditions	Neither Flammable Gas, Halogen Gas, Silica, Corrosive Gas nor Vapor shall be contained. Pressure: 29.5kPa or less required Flow Rate: 1000-2000ml/min Temperature: 50°C or Less Humidity: Dew point shall be lower than ambient temperature.
Power Source	Voltage: 100V-240VAC Frequency: 50/60Hz
Installed Location	Indoors, Non-Explosion Area Ambient Temperature ; 0-50°C Ambient Humidity ; 45-85%RH, No dew generated
Option	Activated Carbon Filter, Cotton Filter

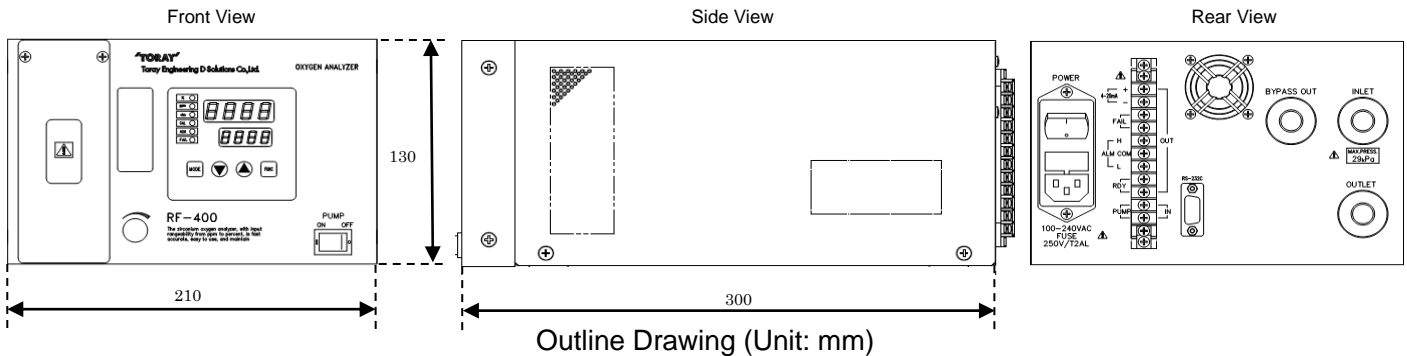

Cautions

For your safety and correct operation, please read the instruction manual carefully before use.

TORAY Toray Engineering D Solutions Co.,Ltd.

Sensing Device Sales Dept., Sales Div.
West Japan

1-45, Oe 1chome, Otsu shi, Shiga, 520-2141, Japan
Tel: +81-77-544-6224 Fax: +81-77-544-1679

East Japan

8-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo, 100-0005,
JAPAN

Tel: +81-3-5962-9775 Fax: +81-3-5962-9778

URL : <https://www.toray-eng.com/tds/>

In case Customer exports (or provides to non-residents) the Product(s) falls into the category of export permission or approval object cargo (or technology) under the laws of Customer's country in these Products (Including software), Customer shall obtain export permission or approval (or obtain permission for service transactions) pursuant to the provisions of laws of Customer's country. Therefore, we ask Customer to perform the necessary procedures such as application for export permission required by Customer's country's law if Customer exports (and/or provides to non-residents) these items.