



Pro Form Products Ltd  
604 McGeachie Drive  
Milton, ON, L9T 3Y5  
Canada  
905-878-4990

**PRODUCT: PF 556 E-COAT DTM PRIMER 3 IN 1 (OLIVE GREEN)**

## SECTION 01: IDENTIFICATION


Initial supplier identifier..... Pro Form Products Ltd.  
604 McGeachie Drive  
Milton, Ontario L9T3Y5  
Tel (905) 878-4990 Fax (905) 878-1189

Product identifier..... PF 556 E-COAT DTM PRIMER 3 IN 1 (OLIVE GREEN)

24 hour emergency number:..... CANUTEC: 1-613-996-6666.

Recommended use and restrictions on .. Primer.  
use

## SECTION 02: HAZARD IDENTIFICATION

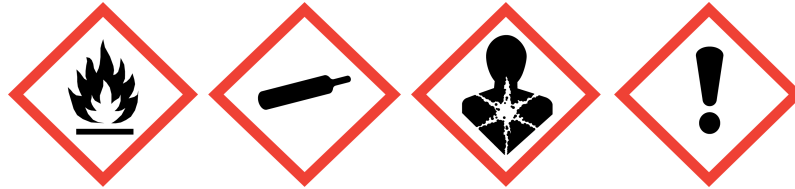

Signal Word..... DANGER.

Hazard Classification..... Flammable Aerosols — Category 2. Gases Under Pressure: Liquefied Gas. Skin Corrosion/Irritation — Category 2. Serious Eye Damage/Eye Irritation — Category 2A. Sensitization - Skin — Category 1. Germ Cell Mutagenicity 1B. Carcinogenicity — Category 1. Reproductive Toxicity — Category 1. Specific Target Organ Toxicity — Single Exposure — Category 1. (Respiratory, CNS). Specific Target Organ Toxicity — Repeated Exposure — Category 2. (Auditory system). (Eyes). Aspiration Toxicity 1. Aquatic Acute 1. Aquatic Chronic 3.

Hazard Description..... H223 Flammable aerosol . H229 Pressurized container: may burst if heated. H280 Contains gas under pressure; may explode if heated. H304 May be fatal if swallowed and enters airways. H315 Causes skin irritation. H317 May cause an allergic skin reaction. H319 Causes serious eye irritation. H340 May cause genetic defects. H350 May cause cancer. H360 May damage fertility or the unborn child. H370 Causes damage to organs. H373 May cause damage to organs through prolonged or repeated exposure. H400 Very toxic to aquatic life. H412 Harmful to the aquatic life with long lasting effects.

Prevention..... P201 Obtain special instructions before use. P202 Do not handle this product until all safety instructions have been read and understood. P210 Keep away from heat, sparks, open flames and hot surfaces. No smoking. P211 Do not spray on an open flame or other ignition sources. P251 Do not pierce or burn container, even after use. P260 Do not breathe the mist, vapours, or spray. P261 Avoid breathing mists, vapours and sprays. P264 Wash thoroughly after handling. P270 Do not eat drink or smoke while using this product. P272 Contaminated work clothing should not be allowed out of the workplace. P273 Avoid release to the environment. P280 Wear protective gloves and eye protection.

Response ..... P301 + P310 If swallowed IMMEDIATELY CALL A POISON CONTROL CENTRE and follow instructions provided by the centre. P302 + P352 - If on skin: wash with plenty of water. P305 + P351 + P338 If in eyes rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing until medical help arrives. P308 + P311 If exposed or concerned; call a poison center or doctor. P314 - Get medical advice/attention if you feel unwell. P321 - For specific treatment see section 4 on this SDS. P331 Do NOT induce vomiting. P332 + P313 - If skin irritation occurs get medical attention or advice. P333 + P313 If skin irritation or rash occurs, get medical advice/attention. P337 + P313 - If eye irritation persists get medical attention. P362 + P364 - Take off contaminated clothing and wash before reuse. P391 Collect spillage.

Storage..... P403 Store in a well ventilated area. P405 Store locked up. P410 Protect from sunlight. P412 Do not expose to temperature exceeding 50°C / 122°F.

Disposal..... P501 Dispose all unused, waste or empty containers in accordance with local regulations.

Other hazards..... None known.

**PRODUCT: PF 556 E-COAT DTM PRIMER 3 IN 1 (OLIVE GREEN)****SECTION 03: COMPOSITION / INFORMATION ON INGREDIENTS**

CHEMICAL NAME AND SYNONYMS	CAS #	WT. %
Acetone	67-64-1	15-40
Propane	74-98-6	7-13
Isobutyl Acetate	110-19-0	7-13
Isobutane	75-28-5	5-10
Methyl Ethyl Ketone	78-93-3	5-10
Titanium Dioxide	13463-67-7	3-7
Methyl Acetate	79-20-9	1-5
2-Propanol, 1-methoxy-, acetate	108-65-6	1-5
Xylene	1330-20-7	1-5
Solvent naphtha (petroleum), light aliph. (VM&P Naphtha)	64742-89-8	1-5
Naphtha (petroleum), hydrotreated light	64742-49-0	1-5
Ethyl 3-Ethoxypropionate	763-69-9	1-5
Talc	14807-96-6	1-5
Ethylbenzene	100-41-4	0.1-1
Distillates (petroleum), hydrotreated light	64742-47-8	0.1-1
Chromium III Oxide	1308-38-9	0.1-1
Benzene, ethenylmethyl-	25013-15-4	0.1-1
Solvent Naphtha, Light Aromatics	64742-95-6	0.1-1
Cobalt bis(2-ethylhexanoate)	136-52-7	0.1-1
Naphtha (petroleum), hydrotreated heavy	64742-48-9	0.1-1
N-methyl pyrrolidone	872-50-4	0.1-1
Naphtha, petroleum, hydrosulfurized heavy	64742-82-1	0.1-1

**SECTION 04: FIRST-AID MEASURES**

Eye contact.....	In case of contact, immediately flush eyes, keeping eyelids open, with plenty of water for at least 15 minutes. Consult a physician if irritation continues.
Skin contact.....	Immediately remove all contaminated clothing, flush skin with water for at least 15 minutes. Wash clothing before reuse. If irritation persists, seek medical attention.
Inhalation.....	If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen, obtain medical attention.
Ingestion.....	Do not induce vomiting. If ingestion is suspected, contact physician or poison control center immediately. If spontaneous vomiting occurs have victim lean forward with head down to prevent aspiration of fluid into the lungs. Never give anything by mouth to an unconscious person.
Most important symptoms and effects, ..... whether acute or delayed	May cause genetic defects. May cause cancer. May damage fertility or the unborn child. Causes damage to organs. May cause damage to organs through prolonged or repeated exposure if inhaled. May be fatal if swallowed and enters airways.
Immediate medical attention and special treatment needed, if necessary	Provide supportive measures and treat symptomatically. Treat victims symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim under observation. Symptoms may be delayed.

**SECTION 05: FIRE-FIGHTING MEASURES**

Suitable extinguishing media.....	"Alcohol" foam, CO2, dry chemical. In cases of larger fires, water spray should be used.
Unsuitable extinguishing media.....	Do not use solid water streams or water jet.
Specific hazards arising from the ..... hazardous product, such as the nature of any hazardous combustion products	Do not allow run-off from fire fighting to enter drains or water courses. Vapors may form explosive mixture in air. Vapors may travel considerable distance to a source of ignition and flash back. Thermal decomposition products are toxic. May include: Oxides of carbon (CO, CO2). Other potentially toxic fumes.
Special protective equipment and ..... precautions for fire-fighters	Firefighter should be equipped with self-contained breathing apparatus and full protective clothing to protect against potentially toxic and irritating fumes. Cool fire-exposed containers with cold water spray. Heat will cause pressure buildup and may cause explosive rupture. Keep run-off water from entering sewers and other waterways. Dike for water control.
General Fire Hazards.....	Flammable aerosol.

**PRODUCT: PF 556 E-COAT DTM PRIMER 3 IN 1 (OLIVE GREEN)****SECTION 06: ACCIDENTAL RELEASE MEASURES**

Personal precautions, protective equipment and emergency procedures	No action shall be taken involving any personal risk or without suitable training. Ventilate and emergency procedures area. Keep unnecessary and unprotected personnel from entering. Avoid walking through spilled material. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see Section 08). Isolate area and keep unauthorized people away.. Open windows and doors to allow air circulation. Dike area to prevent spreading. Stop leak if safe to do so. Prevent runoff into drains, sewers, and other waterways.
Methods and materials for containment and cleaning up	Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, and Cleaning Up earth, diatomaceous earth, vermiculite) and place in container for disposal according to local, provincial & federal regulations (see section 13). Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Always wear PPE during cleanup.
Environmental precautions.....	Do not allow product to leak into drains or waterways. If spill does contaminate waterways then inform authorities.

**SECTION 07: HANDLING AND STORAGE**

Precautions for safe handling.....	Do not spray on a naked flame or any incandescent material. Keep away from heat, sparks, and open flame. Avoid all skin contact and ventilate adequately, otherwise wear an appropriate breathing apparatus. Avoid breathing vapours or mist. Employees should wash hands and face before eating or drinking. Avoid all sources of ignition. Smoking, eating and drinking should be prohibited in the application area.
Conditions for safe storage, including any incompatibilities	No smoking. Observe label precautions. Keep away from heat, sparks, and open flames. Store away from oxidizing and reducing materials. Store away from sunlight. Pressurized container, do not expose to temperatures exceeding 50°C (122°F). Do not puncture, incinerate or crush container. Store locked up.

**SECTION 08: EXPOSURE CONTROLS / PERSONAL PROTECTION**

INGREDIENTS	TWA	ACGIH TLV STEL	PEL	OSHA PEL STEL	REL	NIOSH
Acetone	250 ppm TLV CA ON AB: 500ppm (TWA); 750ppm (STEL)	500 ppm	1,000 ppm	Not established	250 ppm	
Propane	1,000 ppm	Not established	1,000 ppm	Not established	1,000 ppm	
Isobutyl Acetate	50 ppm	150 ppm	150 ppm	Not established	150 ppm	
Isobutane	Not established	Not established	Not established	Not established	800 ppm	
Methyl Ethyl Ketone	200 ppm CA ON: 200ppm (TWA), 300ppm (STEL)	300 ppm	200 ppm	Not established	200 ppm TWA	
Titanium Dioxide	10 mg/m3 CA ON: 10 mg/m3 (TWA)	Not available	15 mg/m3	Not available	Not available	
Methyl Acetate	200 ppm AB/BC/ON/PQ: 200ppm (TWA), 250ppm (STEL)	250 ppm	200 ppm	250 ppm in some States	200 ppm	
2-Propanol, 1-methoxy-, acetate	50 ppm	75 ppm	Not established	Not established	Not established	
Xylene	50 ppm CA ON: 100ppm (TWA); 150ppm (STEL)	150 ppm	100 ppm TWA	Not available	Not available	
Solvent naphtha (petroleum), light aliph. (VM&P Naphtha)	100 ppm Not available	300 ppm	100 ppm	Not established	Not established	
Naphtha (petroleum), hydrotreated light	1640 mg/m3 (heptane) 1100 ppm (IDLH)	Not established	Not established	Not established	Not established	
Ethyl 3-Ethoxypropionate	Not established	Not established	Not established	Not established	Not established	
Talc	2 mg/m3 CA ON: 2mg/kg (TWA)	Not available	2 mg/m3 TWA	Not available	2 mg/m3	

**PRODUCT: PF 556 E-COAT DTM PRIMER 3 IN 1 (OLIVE GREEN)****SECTION 08: EXPOSURE CONTROLS / PERSONAL PROTECTION**

INGREDIENTS	TWA	ACGIH TLV STEL	PEL	OSHA PEL STEL	REL NIOSH
Ethylbenzene	100 ppm	125 ppm	100 ppm	Not established	100 ppm / STEL 125 ppm
	CA ON: 20ppm (TWA)				
Distillates (petroleum), hydrotreated light	1200 mg/m3	Not established	Not established	Not established	Not established
Chromium III Oxide	Not established	Not established	Not established	Not established	Not established
	Not available				
Benzene, ethenylmethyl-	50 ppm	100 ppm			
	25 ppm (STEV)				
Solvent Naphtha, Light Aromatics	Not established	Not established	500 ppm (2000 mg/m3) TWA	Not established	350 mg/m3 TWA
Cobalt bis(2-ethylhexanoate)	0.05 mg/cu.m.	0.05 mg/cu.m.	No data	No data	No data
	TLV Long-term value 0.02 mg/m3				
Naphtha (petroleum), hydrotreated heavy	175 ppm	Not available	Not available	Not available	Not available
	Not available				
N-methyl pyrrolidone	100 ppm TWA (US WEEL)				
Naphtha, petroleum, hydrodesulfurized heavy	Not available	Not available	Not available	Not available	Not available
	Not available				

**Personal Protective Equipment**

Eye/type.....	Liquid chemical goggles. Consult your personal protective equipment supplier for additional recommendations.
Respiratory/type.....	Wear an appropriate, properly fitted respirator when contaminant levels exceed the recommended exposure limits. Consult your personal protective equipment supplier for additional recommendations.
Gloves/ type.....	Chemical resistant gloves. Consult your personal protective equipment supplier for additional recommendations.
Clothing/type.....	Wear chemical resistant clothing. Consult your personal protective equipment supplier for additional recommendations.
Footwear/type.....	Wear chemical resistant safety boots. Consult your personal protective equipment supplier for additional recommendations.
Other/type.....	Emergency showers and eye wash stations should be available.
Appropriate engineering controls.....	Local exhaust at points of emission. Ventilation system should be designed for vapors and explosion proof for handling solvent vapors.

**SECTION 09: PHYSICAL AND CHEMICAL PROPERTIES**

Form.....	Aerosol.
Appearance/Physical state.....	Spray mist.
Colour.....	Not available.
Odour.....	Hydrocarbon.
Odour threshold (ppm).....	Not available.
Vapour pressure (mm Hg).....	Not available.
Vapour density (air=1).....	Not available.
pH.....	Not applicable.
Relative Density (Specific Gravity).....	Not available.
Melting / Freezing point (deg C).....	Not available.
Solubility.....	Not available.
Initial boiling point / boiling range (deg C).....	Not available.
Evaporation rate.....	Not available.
Flash point (deg C), method.....	-155.27°F (-104.039 °C) Closed Cup. (Propellant).
Auto ignition temperature (deg C).....	450°C (842°F). (Propellant).
Lower flammable limit (% vol).....	2.0. (Propellant).
Upper flammable limit (% vol).....	9.5. (Propellant).
Partition coefficient — n-octanol/water.....	Not available.
Decomposition temperature.....	Not available.
Viscosity.....	Not available.
% Weight Volatile (VOC).....	Greater than 45%.

**PRODUCT: PF 556 E-COAT DTM PRIMER 3 IN 1 (OLIVE GREEN)****SECTION 09: PHYSICAL AND CHEMICAL PROPERTIES**

Total MIR..... 0.70.

**SECTION 10: STABILITY AND REACTIVITY**

Chemical stability..... Stable at normal temperatures and pressures.  
 Reactivity ..... Non-reactive under normal conditions of use, storage or transport.  
 Conditions to avoid, including static ..... Heat, sparks and open flames. Ignition sources. Contact with incompatible substances.  
 discharge, shock or vibration  
 Possibility of hazardous reactions..... Hazardous polymerization will not occur. Vapours may form explosive mixture with air.  
 Incompatible materials..... Strong acids. Strong bases. Strong oxidizing agents. Halogens.  
 Hazardous decomposition products..... Oxides of carbon (CO,CO2).

**SECTION 11: TOXICOLOGICAL INFORMATION**

INGREDIENTS	LC50	LD50
Acetone	50,100 mg/m3 8 hours, rat	5,800 mg/kg (rat oral)
Propane	>1,464 mg/L 15 minutes rat	Not available
Isobutyl Acetate	>13.24 mg/L /6 h rat	15400 mg/kg (rat oral), >17400 mg/kg (rabbit dermal)
Isobutane	52 mg/L 1 hour mouse	Not available
Methyl Ethyl Ketone	>5,000 ppm (6 hours, rat), 11000 ppm (45 minutes, mouse)	3,400 mg/kg (rat, oral), >8000 mg/kg (rabbit, dermal), 670 mg/kg (mouse, oral)
Titanium Dioxide	>6.8 mg/L (4 hr)	>10,000 mg/kg (rat, oral) >10,000 mg/kg (rabbit, dermal)
Methyl Acetate	>49 mg/L (4 hr) rat	6482 mg/kg (oral rat); >2,000 mg/kg (dermal rat)
2-Propanol, 1-methoxy-, acetate	Not Available	8,532 mg/kg rat oral 5,000 mg/kg dermal rabbit
Xylene	6350 ppm 4 hours rat	>3523 mg/kg rat oral
Solvent naphtha (petroleum), light aliph. (VM&P Naphtha)	3400 ppm 4hr Rat	>2000 mg/kg Oral Rat >2000 mg/kg Dermal Rat
Naphtha (petroleum), hydrotreated light	73680 ppm 4 hours rat	>5000 mg/kg (oral, rat) >3160 mg/mg (dermal, rabbit)
Ethyl 3-Ethoxypropionate	>998 ppm 6 hours	4,309 mg/kg rat oral 4,080 mg/kg rabbit dermal
Talc	Not available	Not available
Ethylbenzene	No data	3,500 mg/kg rat oral 17,800 mg/kg rabbit dermal
Distillates (petroleum), hydrotreated light	>3,000 mg/kg (dermal, rabbit)	>5,000 mg/kg (oral, rat)
Chromium III Oxide	Not available	Not available
Benzene, ethenylmethyl-	Not available	Not available
Solvent Naphtha, Light Aromatics	5.2 mg/L 4 hours, rat 3400 ppm 4 hours, rat	>5,000 mg/kg (rat oral) >2,000 mg/kg (rabbit dermal)
Cobalt bis(2-ethylhexanoate)	No data	1220-1550 mg/kg (oral, rat)
Naphtha (petroleum), hydrotreated heavy	>8500 mg/m3 (rat, 4 hr)	>6000 mg/kg (oral, rat)
N-methyl pyrrolidone	>5.6 MG/L (RAT)	3600 mg/k (oral, rat) 8000 mg/kg (dermal, rabbit)
Naphtha, petroleum, hydrodesulfurized heavy	Inhalation LC50 (Rat): > 11.6 mg/l	Oral LD50 (Rat): > 5,000 mg/kg Dermal LD50 (Rabbit): > 3,000 mg/kg

Route of exposure..... Eye contact. Skin contact. Inhalation. Ingestion.  
 Serious eye damage/eye irritation..... Causes serious eye irritation.  
 Skin corrosion/irritation..... Causes skin irritation.  
 Skin Sensitization..... May cause an allergic skin reaction.  
 Respiratory Sensitization..... Not classified.

**PRODUCT: PF 556 E-COAT DTM PRIMER 3 IN 1 (OLIVE GREEN)****SECTION 11: TOXICOLOGICAL INFORMATION**

Carcinogenicity.....	IARC has classified Titanium Dioxide as a "Group 2B"; possibly carcinogenic to humans. Ethylbenzene is classified as an A3 known animal carcinogen. Xylene has been listed by IARC as a Group 3; not classifiable as to its carcinogenicity to humans.
Mutagenicity.....	May cause genetic defects.
Reproductive effects.....	Reproductive toxicity (developmental): N-methyl pyrrolidone. High level exposure to Xylene in some animal studies have been reported to cause health effects on the developing embryo/fetus.
STOT-SE.....	Causes damage to organs. Certain components of this product causes narcotic effects. Central nervous system.
STOT-RE.....	May cause damage to organs through prolonged and repeated exposure.
Aspiration Hazard.....	May be fatal if swallowed and enters airways.

**SECTION 12: ECOLOGICAL INFORMATION**

Ecotoxicity.....	Very toxic to aquatic life . Harmful to aquatic life with long lasting effects.
Bioaccumulative potential.....	Not available as a product.
Mobility in soil.....	Not available as a product.
Persistence and degradability.....	Not available as a product.
Other adverse effects.....	No additional information available.

**SECTION 13: DISPOSAL CONSIDERATIONS**

Information on safe handling for disposal and methods of disposal, including any contaminated packaging	This material and its container must be disposed of as hazardous waste. Avoid release to the environment. Dispose of waste in accordance with all applicable Federal, Provincial/State and local regulations.
---	---

**SECTION 14: TRANSPORT INFORMATION**

TDG Classification.....	UN1950, AEROSOLS, Class 2.1, Ltd. Qty.
DOT Classification (Road).....	UN1950, AEROSOLS, Class 2.1, Ltd. Qty., Consumer Commodity ORM-D.
IATA Classification (Air).....	UN1950, AEROSOLS, Class 2.1, Ltd. Qty.
IMDG Classification (Marine).....	UN1950, AEROSOLS, Class 2.1, Ltd. Qty.
Marine Pollutant.....	No.
Proof of Classification.....	In accordance with Part 2.2.1 of the Transportation of Dangerous Goods Regulations (July 2, 2014) - we certify that classification of this product is correct. .

**SECTION 15: REGULATORY INFORMATION**

CEPA status.....	All substances are on the DSL or are exempt.
CEPA Schedule 1 and Certain Substances (Part 2 of Schedule 1)	(CAS # 136-52-7).
National Pollutant Release Inventory (NPRI)	(CAS # 74-98-6 (CAT 5)). (CAS # 78-93-3 (Cat 1A & 5)). (CAS # 108-65-6 (CAT 5)). (CAS # 1330-20-7 (CAT 1A & 5)). (CAS # 64742-89-8 (Cat 5)). (CAS # 100-41-4 (CAT 1A)). (CAS # 64742-47-8 (CAT 5)). (CAS # 64742-95-6 (Cat 5)). (CAS # 64742-48-9 (CAT 5)). (CAS # 872-50-4 (CAT 1A)).
Environmental Emergency Regulations....	Propane (CAS # 74-98-6) Part 1. Isobutane (CAS # 75-28-5) Part 1. Xylene (CAS # 1330-20-7 ) Part 1. Ethylbenzene (CAS # 100-41-4) Part 1.
Categorization of the DSL.....	(CAS # 67-64-1). (CAS # 74-98-6). (CAS # 110-19-0). (CAS # 75-28-5). (CAS # 78-93-3). (CAS # 13463-67-7). (CAS # 64742-89-8). (CAS # 64742-49-0). (CAS # 14807-96-6). (CAS # 100-41-4). (CAS # 1308-38-9). (CAS # 64742-47-8). (CAS # 64742-95-6). (CAS # 136-52-7). (CAS # 64742-48-9). (CAS # 64742-82-1). (CAS # 872-50-4).
TSCA inventory status.....	All components are either listed or exempt from the TSCA. .
OSHA.....	This product is considered hazardous under the OSHA Hazard Communication Standard.
SARA Title III	
Section 302 - extremely hazardous substances	None.
Section 311/312 - hazard categories.....	Immediate health, delayed health, fire hazard.
Section 313.....	Methyl Ethyl Ketone. Xylene. Ethylbenzene. N-Methyl-2-pyrrolidone.
EPA hazardous air pollutants (HAPS) ..... 40CFR63	Xylene. Ethylbenzene.
California Proposition 65.....	*WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. (N-methyl pyrrolidone (nmp)(D)). *WARNING: This product contains a chemical known to the State of California to cause cancer. (Ethylbenzene (C)). For more information, go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
Note.....	The VOC content listed in section 9 is as per the interpretation that there is no CARB or ECCC category for this product format - therefore, there is no limit to meet.



PRODUCT: PF 556 E-COAT DTM PRIMER 3 IN 1 (OLIVE GREEN)

SECTION 16: OTHER INFORMATION

Prepared by: ..... REGULATORY AFFAIRS.  
Telephone number:..... (800) 387-7981.

Disclaimer:..... DISCLAIMER: All information appearing herein is based upon data obtained from experience and recognized technical sources. To the best of our knowledge, it is believed to be correct as of the date of issue but we make no representations as to its accuracy or sufficiency and do not suggest or guarantee that any hazards listed herein are the only ones which exist. The hazard information contained herein is offered solely for the consideration of the user, subject to his own investigation and verification of compliance with applicable regulations, including the safe use of the product under every foreseeable condition. The information relates only to the product designated herein, and does not relate to its use in combination with any other material or in any other process.

NFPA Storage Level..... Level 2.  
Date of the latest revision of the safety .. 2024-11-13  
data sheet